

How to Mount GlassMovie Rear Projection Film

To apply this adhesive-backed screen to windows, glass, acrylic or polycarbonate substrates, have the following items ready to use:

- Rear Projection Film
- Spray bottle with 50 ounces water to 1 table-spoon Johnsons baby shampoo mixture
- Blue Max rubber-blade squeegee
- Dry, soft cloth (preferably microfiber)
- Electrical tape to mark the boundaries of the screen (if smaller than the substrate)

***Please note that this film can have slight variation in pigment when viewed from different angles. To reduce or eliminate this affect when seaming together multiple sections orient all seamed sections in the same direction as cut from the roll.**

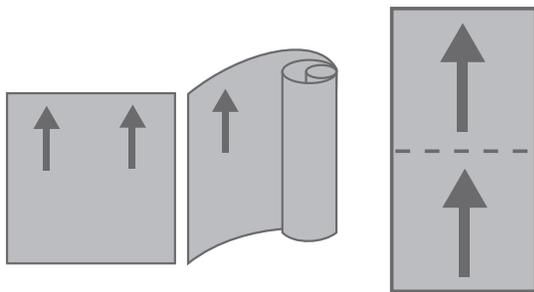


FIGURE 1

Keep orientation of pieces consistent

1. Thoroughly clean the substrate of dirt, dust and oils using soapy solution, then squeegee the excess solution from the substrate.
2. If the screen is smaller than the substrate, use electrical tape to mark the area that the screen will be applied. This can be marked from the opposite side of the substrate.

MACtac GlassMovie™ Installation Instructions

3. Peel the adhesive release liner from the screen while spraying the adhesive-side of screen and the surface of the substrate with soapy water solution.

NOTE: Make sure to peel the release liner evenly from both corners to prevent the screen from creasing or folding over on itself.

4. Place the screen carefully on the substrate while aligning the edges to the tape.
5. Spray front of film with soapy water solution. This will allow the squeegee to glide more smoothly over the top of the screen and help prevent scratching.

6. Remove the water and any air bubbles with the squeegee blade by squeegeeing the water from the center of the screen toward the edges.

!!Note!!

Purge ALL water and air from beneath the film during installation. Any trapped water or air will not evaporate on its own and will likely cause bubbling.

7. Repeat Steps 3 to 6 if joining two or more pieces together. [See FIGURE 1.]
8. Remove the excess water with a dry, soft cloth.
9. Remove the tape if necessary.

NOTE: Do not apply over tinted window films.

Care & Cleaning

To clean, use a diluted solution of 1 window cleaner (Windex, Glass Plus, etc.) to 10 parts water. Spray cleaner directly onto cloth until cloth is moistened. Do **NOT** spray directly onto film. Wipe down screen and immediately repeat with a clean, dry, soft cloth. Do not use any cleaners with ammonia, alcohols, or industrial cleaning fluids!